



## BestTrack® Pinewood Derby® Tracks

By: SRM Enterprises, Inc.


P.O. Box 53

Forest City, IA 50436

641-585-2299 or Toll Free 1-888-582-2299

Thank you for purchasing the **BestTrack®** Leveling Kit for your Pinewood Derby® Track. Please check out our web site at [www.besttrack.com](http://www.besttrack.com) for the latest information on new products.

**Please read through all of the instructions before starting to assemble your track.**

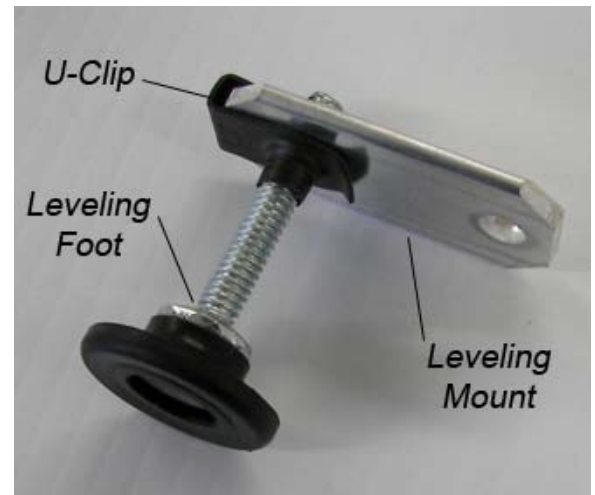


Slide the threaded U-clips onto the leveling mounts snapping them in the **larger** of the two holes. Thread a leveling foot into the Threaded U-clip.



Starting with one section face down, remove only the nut at one end of a connector angle. Place the leveling mount over the bolt and replace the nut. Be sure to position the mount with the foot up as shown in the picture. The leveling mount can be positioned inboard or outboard on the track. Repeat for the other three corners of the track section.

Repeat these steps for all of the straight sections including the stop section.

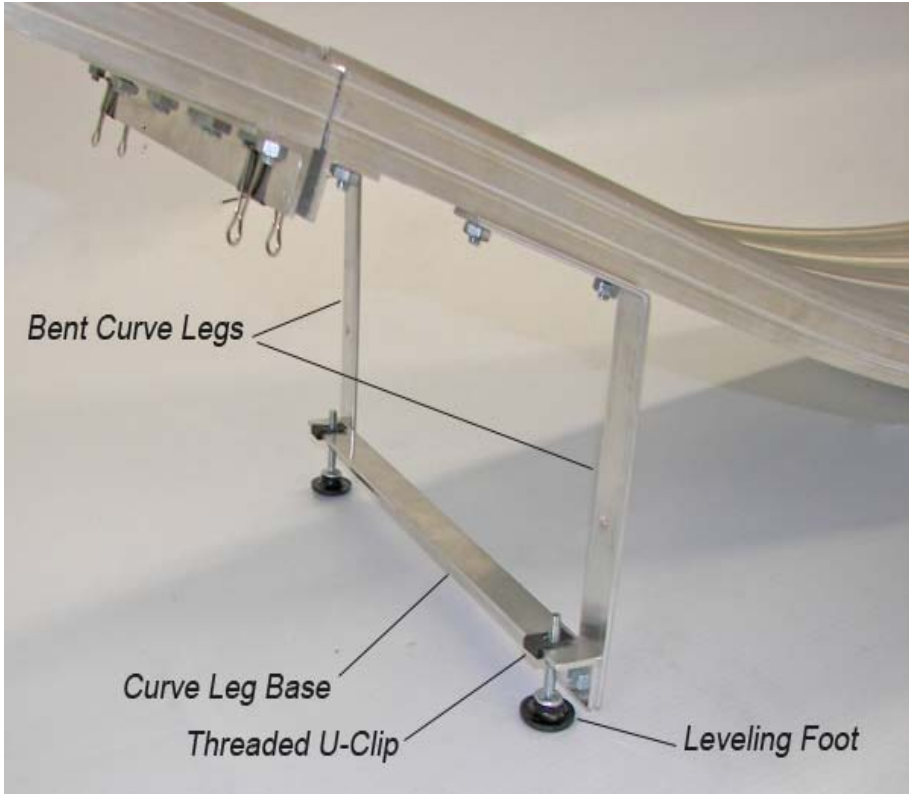

Install leveling mounts with leveling feet at the bottom end of the curve section as you did with the straight section. Attach these at the bottom end of your curve section as in the previous section.

Slide two Threaded U-clips onto the curve leg base so that they snap into the large holes at each end. Thread a leveling foot into each U-clip. Bolt the curve leg base to the bottom of the curve legs using two 1/4-20 X 1/2" hex bolts and nuts.

**Please Note:**

**Older tracks (prior to 2007)** may not have holes in the bottom of the bent curve legs. Please contact us if you have curve legs without these holes.



Snap two Threaded U-clips into the holes in the stand base. Thread a leveling foot into each U-clip.